

Model | [AM-LL21-64-D60x117-cc-P1-A2-RB-T2-E26](#)

Product Characteristics:




Model Name		LED Bulb 7W
Input Voltage (AC, V)	*Note 1	110V/60Hz
Power Consumption, P_{system} (W)	*Note 1	7W±10%
LED-Type		AS-3528ccA2-C4-A
Q'ty of LED (Pcs)		64Pcs
Beam Spread Angle (°)		120°
Outline Dimensions (DxH, mm)		D60x117 ±4mm
Weight (Kg)		0.11Kg
Operation Temperature (°C)		-30°C~+40°C
Storage Temperature (°C)		-40°C~+65°C
Lifetime to 50% luminous flux (hr), L₅₀ at Ta=25°C		50,000hr
Lifetime to 70% luminous flux (hr), L₇₀ at Ta=25°C		35,000hr
Lamp Base		E26
Color Rendering Index (CRI)	*Note 2	>55

Notes:

Note (1) Tolerance±10%

Note (2) The higher CRI can also be provided on request.

Outline Dimensions:

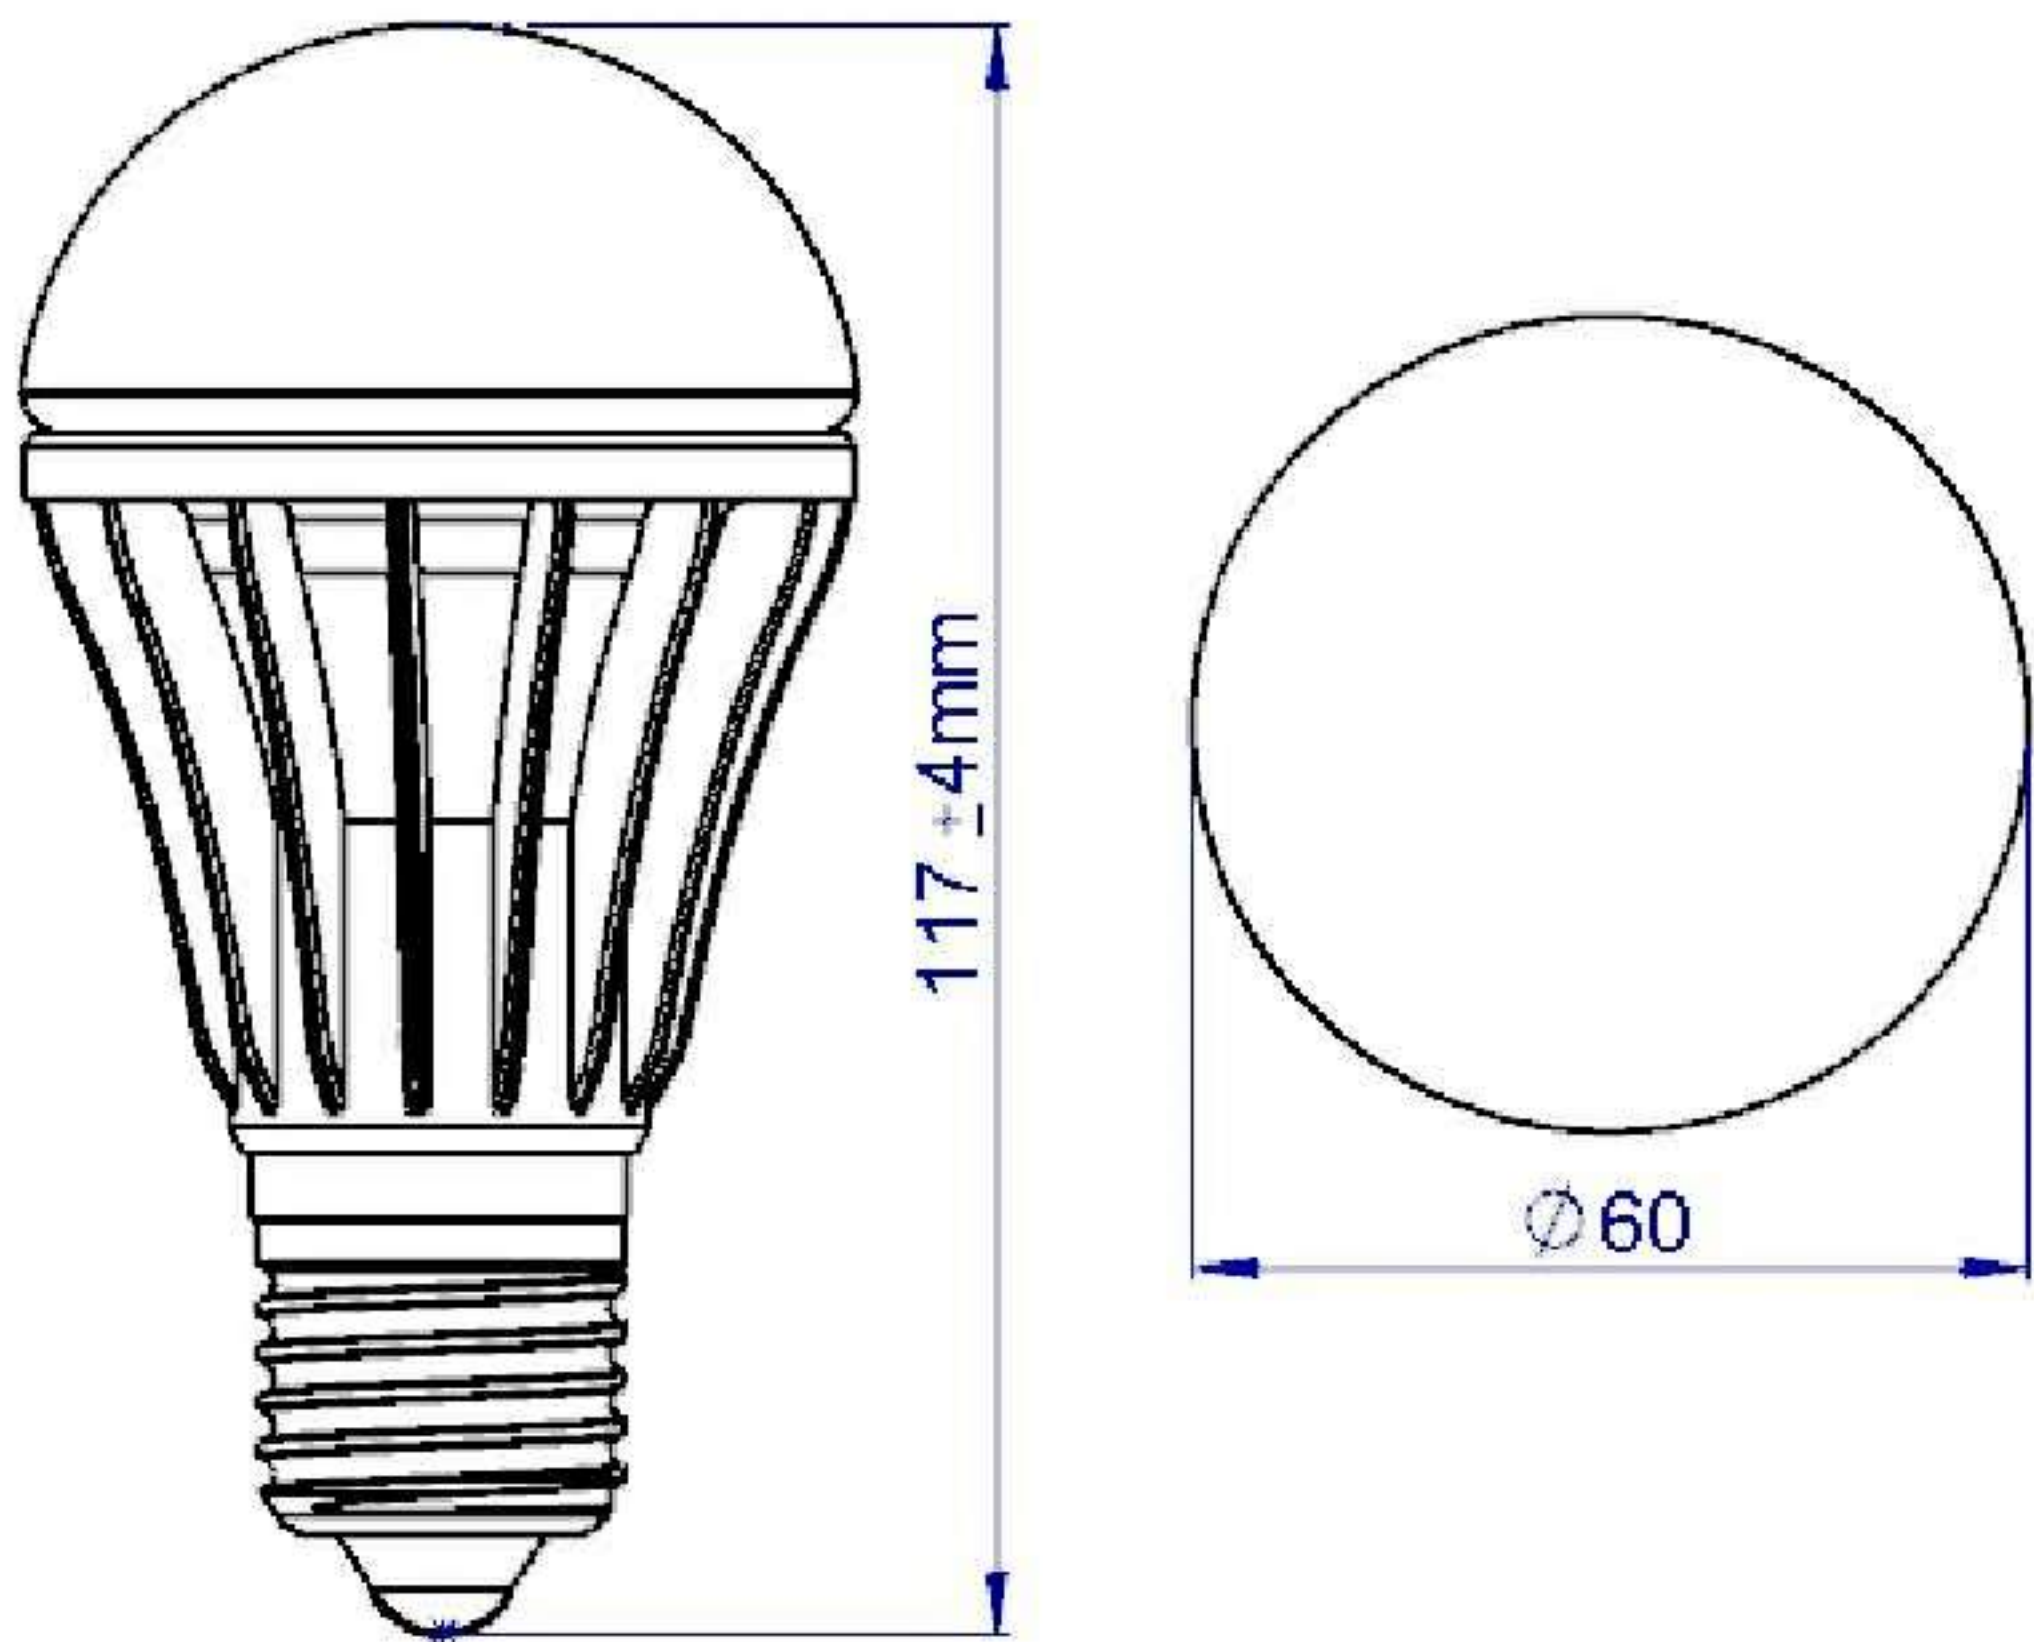

Optical Characteristics:


CCT and Luminous Flux:

Model		Color Temperature (K)			Lumen
		Min	Type	Max	
AM-LL21-64-D60x117- VD -P1-A2-RB-T2-E26	Day White	4745	5000	5311	530
AM-LL21-64-D60x117- WW -P1-A2-RB-T2-E26	Warm White	2870	3000	3220	450

Notes: Tolerance of Lumen: ±10%


Illumination Map:

1. Tolerance of Lux: $\pm 15\%$
2. 120 Deg. (■ 1M ■ 2M ■ 3M)

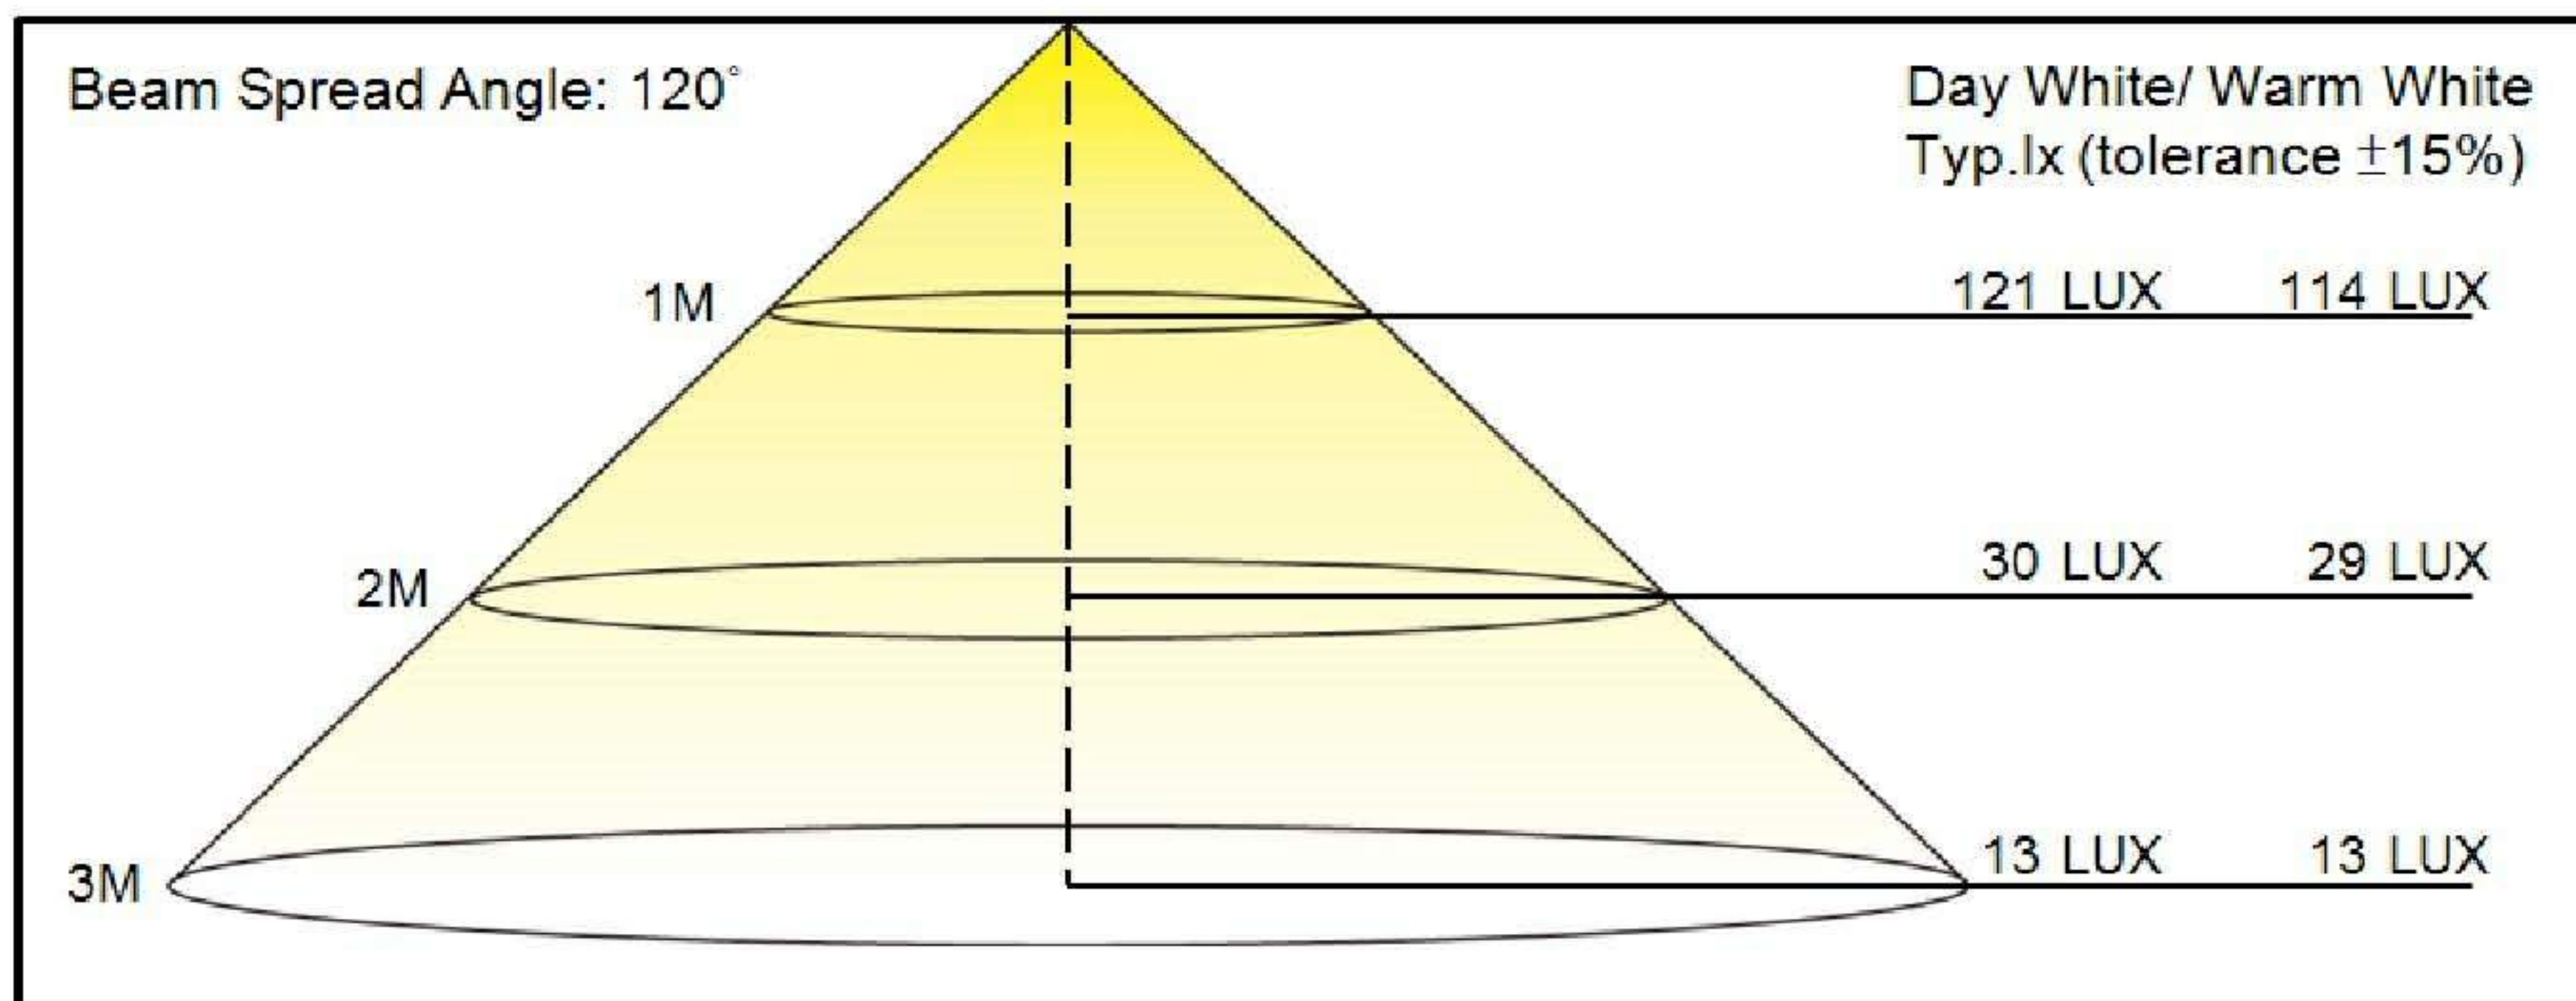

Product Shipment & Label & Package Related:


(A) Inner box: (L:70mmxW:70mmxH:129mm)

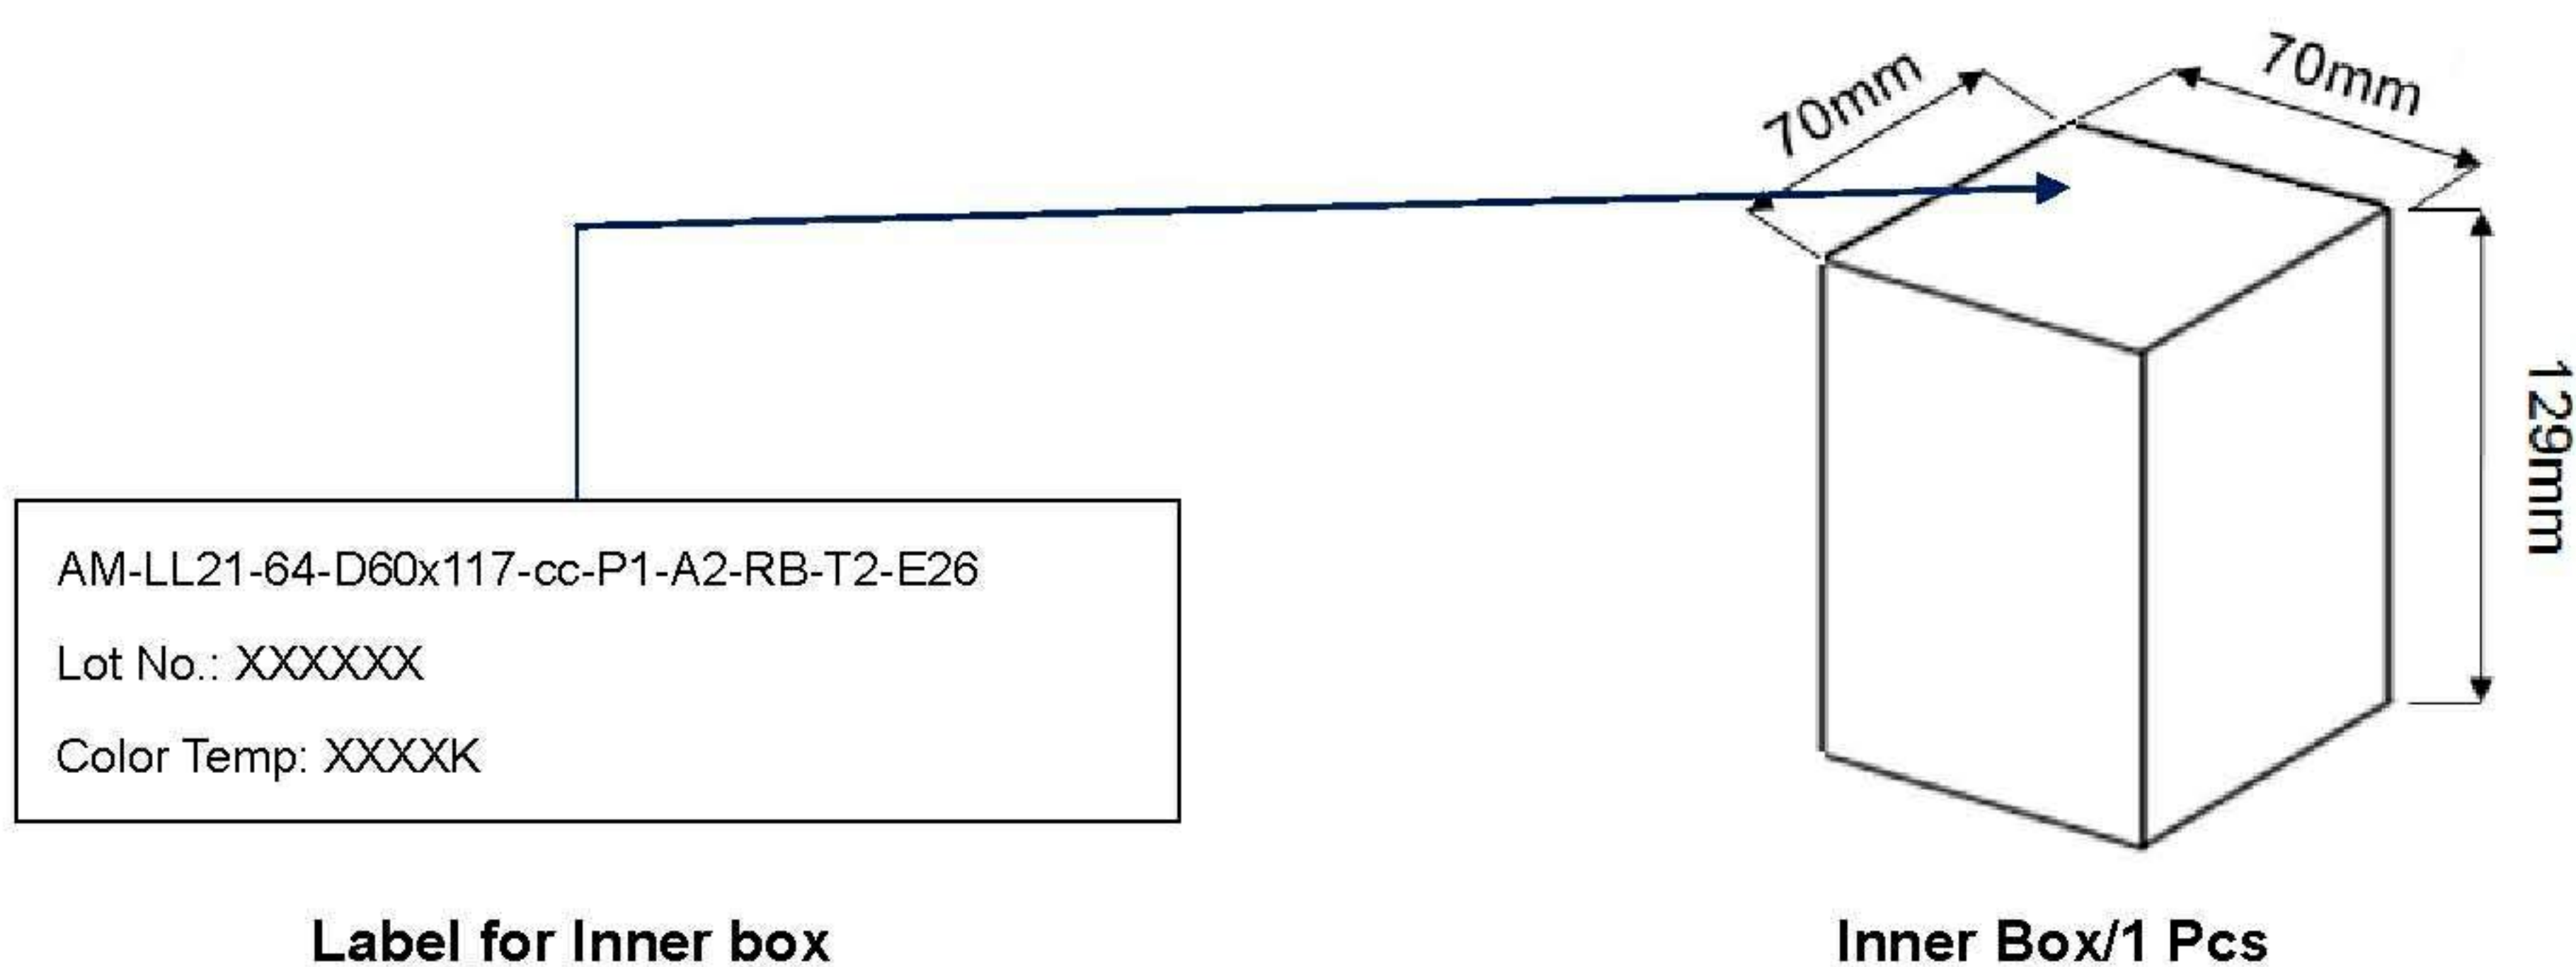

(B) Carton (Outer box): (L:376mmxW:376mmx303mm)

Alder Optomechanical Corp.
 MODEL : AM-LL21-64-D60x117-cc-P1-A2-RB-T2-E26
 LOT NO: MXXXXXXE
 CCT: XXXX K
 Qty: XX Pcs

Label for Carton (Outer box)

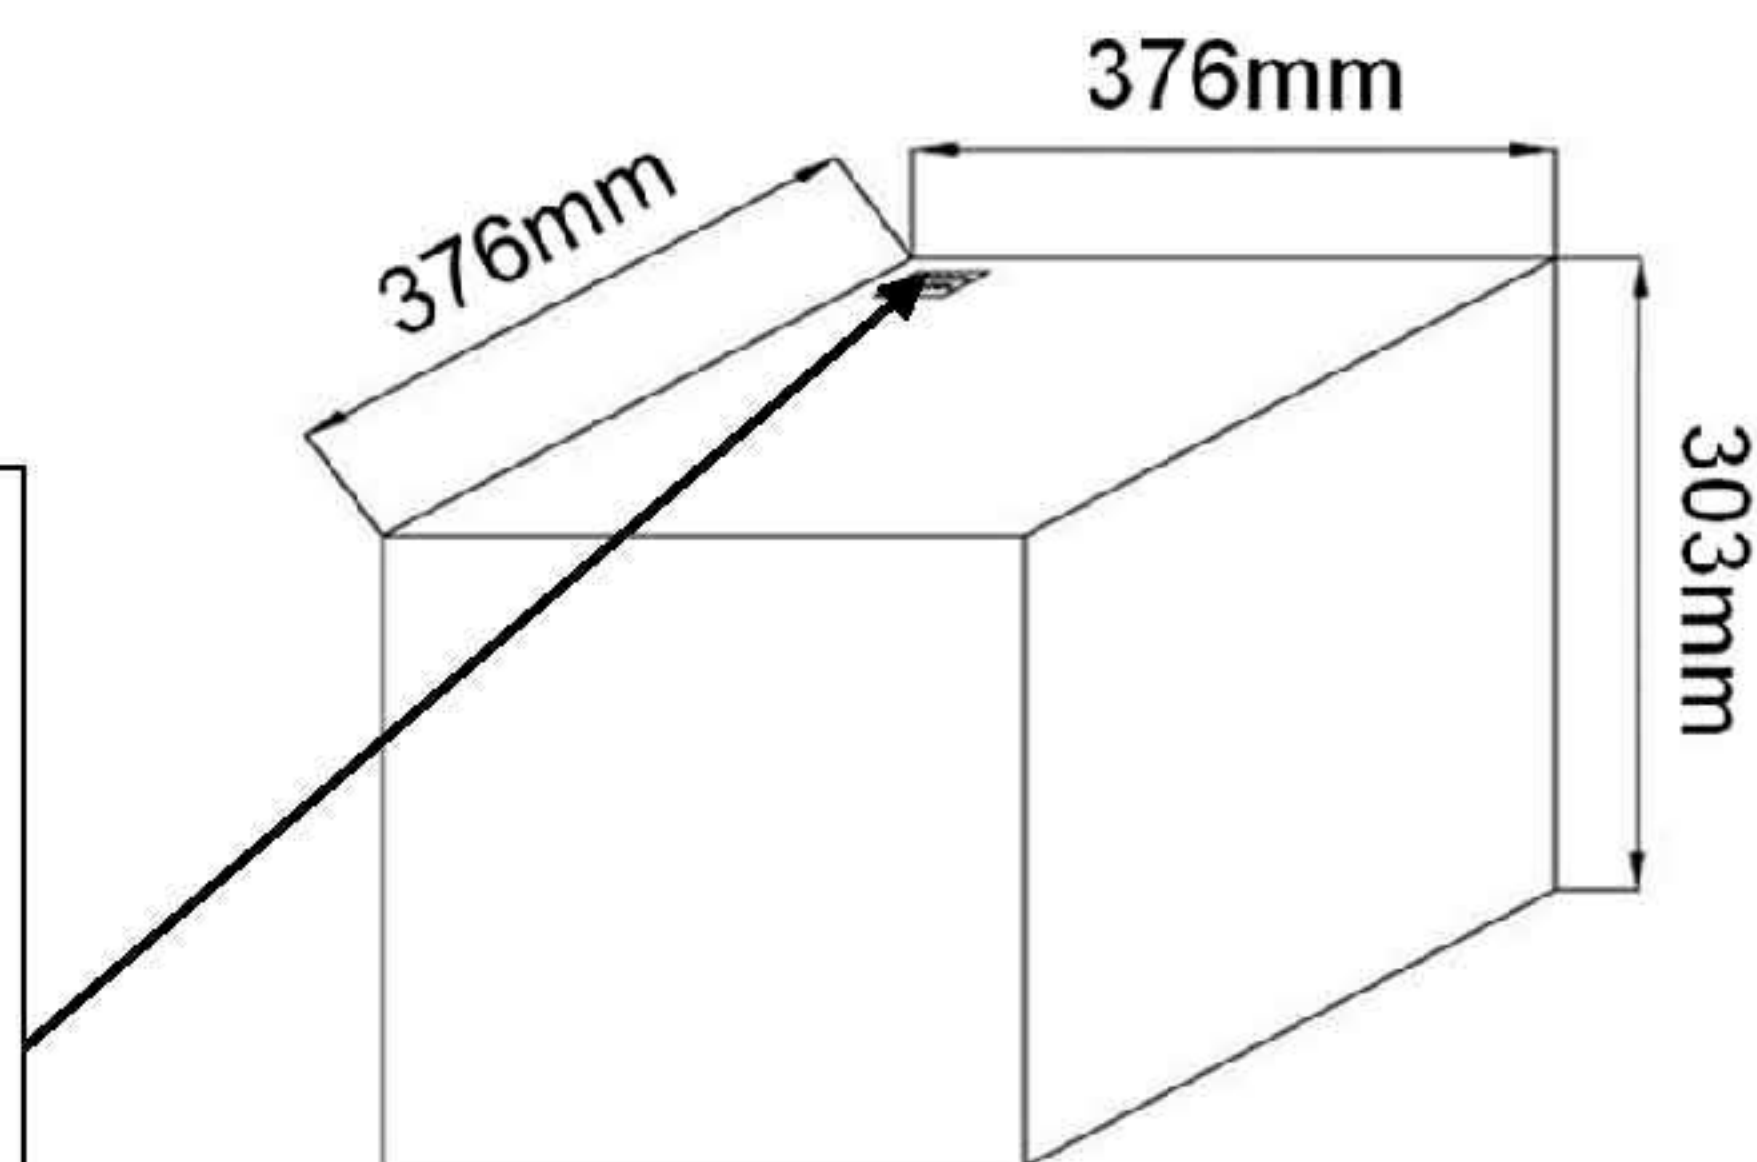

Carton (Outer box)/50 Pcs

Attachment:

Label information:

AM-LL21-64-D60x117-cc-P1-A2-RB-T2-E26	· xxxW 50/60HZ
· XXXX-White · XXXXK · XXXV	20XXWxx-xxx

Rating Label

