

ITEM NO : AP3528QWC


■ Features :

- COMPATIBLE WITH AUTOMATIC PLACEMENT EQUIPMENT
- COMPATIBLE WITH REFLOW SOLDER PROCESS

注意: 静電気対策を行いお取り扱いください
警告: 直視すると眼を傷めることがあります


PRECAUTIONS

- THE DIRECT LIGHT CAUSE INJURIES TO HUMAN EYES.
- AS THE PRODUCTS ARE SUSCEPTIBLE TO STATIC ELECTRICITY, THE UTMOST CARE MUST BE TAKEN WHEN HANDLING THEM.




Material	Light Color	Lens Color
InGaN	White	Water Clear

◆ Package Dimensions


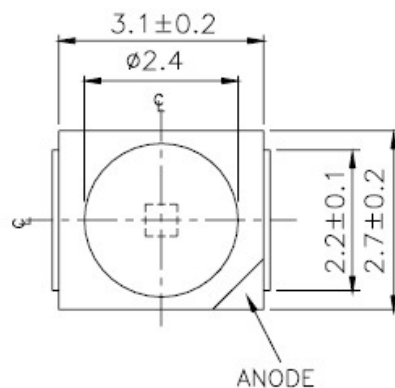


Unit : mm



Tolerance : ±0.1



Polarity

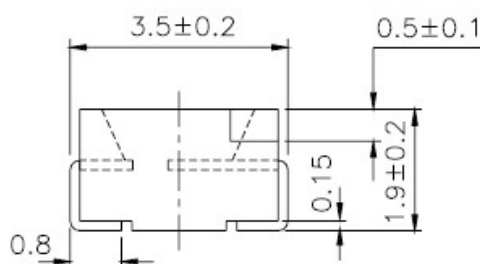

◆ Recommended Soldering Pad Dimensions

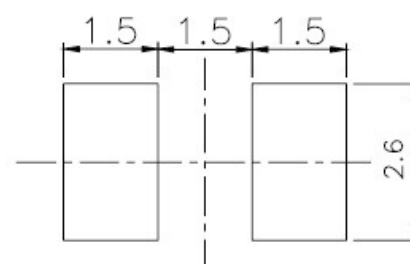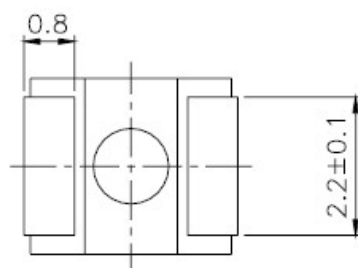

AP3528QWC

◆ Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Maximum	Unit
Power Dissipation	P_D	65	mW
Continuous Forward Current	I_F	30	mA
Peak Forward Current(1/10 Duty Cycle 0.1ms Pulse Width)	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Derating Linear Form 25°C		0.4	mA/°C
Operating Temperature Range	Topr	-30 to +80	°C
Storage Temperature Range	Tstg	-40 to +85	°C

**condition for I_{FP} is pulse of 1/10 duty and 0.1 msec width.

◆ Electrical / Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$	-	3.5	3.8	V
Reverse Current	I_R	$V_R=5\text{V}$	-	-	10	uA
Peak Emission Wavelength	λ	$I_F=20\text{mA}$	0.29	0.31	-	nm
Dominant Wavelength	λ_y	$I_F=20\text{mA}$	0.28	0.30	-	nm
Viewing Angle	θ	$I_F=20\text{mA}$	-	120	-	Deg
Luminous Intensity	I_v	$I_F=20\text{mA}$	2000	2200	-	mcd

◆ Typical Optical-Electrical Characteristic Curves




FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE

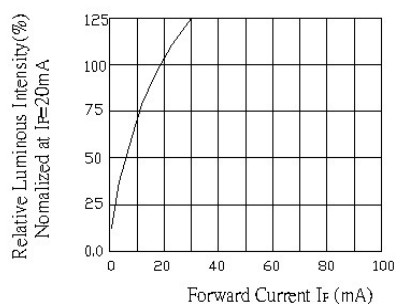


FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




FIG.3 FORWARD CURRENT VS. AMBIENT TEMPERATURE

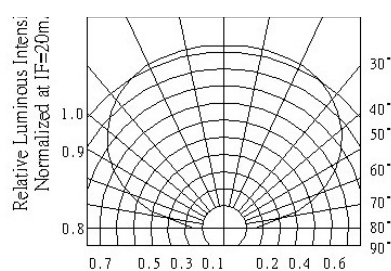



FIG.4 RADIATION DIAGRAM

ITEM NO : AP3528QWC

APONTM

◆ Tape Specification : 2000 pcs Per Reel


Packing Size										Unit : mm			
Item	W	P1	E	F	Do	D1	Po	10Po	P2	Ao	Bo	Ko	T
Spec.	8.00	4.00	1.75	3.50	1.50	1.00	4.00	40.00	2.00	1.85	3.40	1.52	0.22
Tolerance	±0.20	±0.10	±0.10	±0.05	+0.10 -0.00	±0.05	±0.05	±0.20	±0.05	±0.10	±0.10	±0.10	±0.05

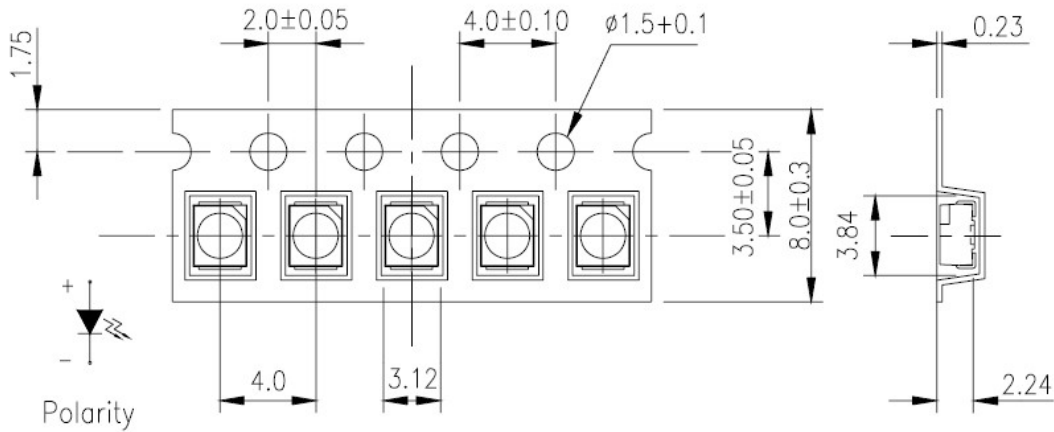

◆ Package Dimensions of Reel

Unit : mm

Tolerance : ±0.3

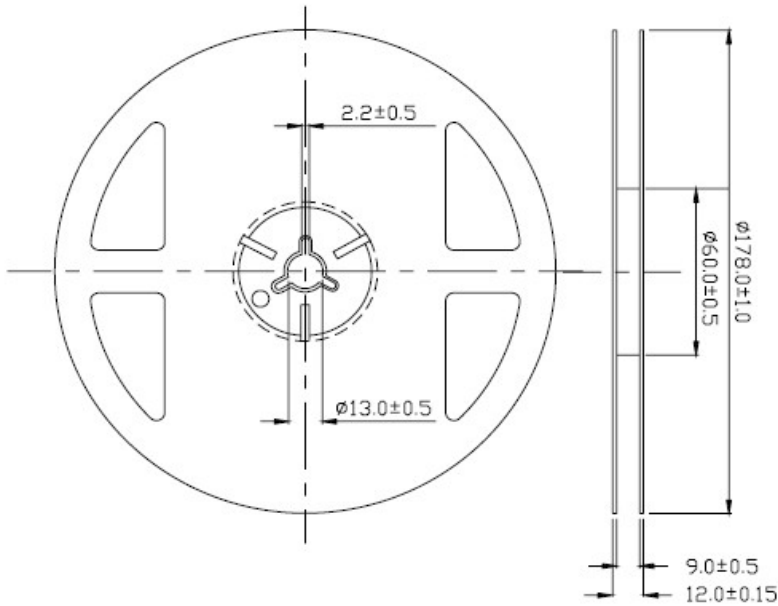

AP3528QWC

APONTM
チェーンヤン技術